Mound City Roofing Tile Company

St. Louis, Mo.

Digitized by:

ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

**BUILDING
TECHNOLOGY
HERITAGE
LIBRARY**

https://archive.org/details/buildingtechnologyheritagelibrary

From the collection of:

**NATIONAL
BUILDING
ARTS
CENTER**

http://web.nationalbuildingarts.org

CATALOGUE E

Mound City Roofing Tile Company

Incorporated December, 1902

ST. LOUIS, MO.

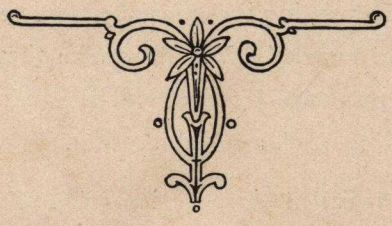

Manufacturers of Modern Shapes of

Shale Roofing Tile and Terra Cotta Trimmings

HIGHEST AWARD

Gold Medal, World's Fair

ST. LOUIS, 1904

A. H. WYERS PRINTING CO., ST. LOUIS, MO.

FACTS

OUR CLAY is the finest grade of shale, making a roofing tile of superior quality and color, burning a solid red throughout at a temperature of 2000 degrees Fahrenheit. Our machinery is the most modern and our plant the most up-to-date in the United States.

Although the natural burned color of our tile is a deep bright red, we manufacture all tiles and trimmings, as shown in this catalogue, in full glaze, in all shades of green, yellow, blue, black, brown, white and mottled. We also make these shades in dull finish, which is produced by direct firing and not by artificial means after burning, such as sand blasting.

Our red tile is called Vitreous Face tile. This class of tile is preferred by a great many architects for several reasons, namely, being vitrified on the exposed surface it will not absorb any moisture from the outside and yet prevent the possibility of dripping caused through condensations at certain seasons of the year, and will not gather soot and dirt, but remain clean.

An absolutely vitrified tile has many of the objectionable features of slate. namely, brittle, a conductor of both heat and cold, and when subjected to extreme heat, such as fire from an adjoining building will crack and fly all to pieces the same as slate. Well burned shale tile will not break from excessive heat and will not break from the settling or structural motion of the roof.

GENERAL INFORMATION

We furnish estimates promptly on application.

Claims for shortage must be made on receipt of goods.

For less than car lots there is an extra charge for packing.

Plans comprising the four elevations and roof plan should accompany orders and all requests for estimates.

In ordering, give exact terminal point, when to be shipped, to whom to ship, and who is to be notified, with address.

Glass tiles are furnished to member with certain pattern for skylights. These may be of clear glass or amber colored glass.

Tiles may be cut on the roof over a regular slater's stake. In all cases, however, short "bites" must be taken. If roofer attempts to cut too much at once it may result in fracturing the material.

Technical Terms:

In order to avoid confusion of names in specifying and ordering material, the following definitions of tile, trimmings and cut work are offered to architects and contractors:

Deck Moulding—This trimming is made to match ridge roll and is used to crown the planes of a roof which has a flat deck.

Ridge Roll—Trimming used on ridge, the height and design of which vary according to the pattern used.

Hip and Ridge Angle—The piece required where the hip starts from the ridge

Hip Roll—Used generally to describe the covering of hips, whether the form is a roll or an angle.

Hip Starters—The closed hip piece which is used at the lower end of the hip roll.

Ridge T—The piece of trimming formed by the intersection (but not the crossing) of two ridges.

Ridge Cross—The piece of trimmings formed by one ridge crossing another ridge.

Mitred Tile—Pieces of tile that are cut at correct angles for upright work, such as dormer corners, etc.

Gable Coping—This term applies to the full flanged tile used at verge of open gables. These are sometimes called barge tile.

Cut Hip Tile—The plain tile which runs against the hip board and is cut at correct angles of the hip.

Eave Closures—A special form of eave tile—a piece made of the same conformation as the Spanish, and which is set back and fastened into the barrel of such shapes, giving the eave line the appearance of open eaves.

Separate Eave Closures—A special form of eave tile made of the same conformation as Spanish, which can be set back any distance into the barrel of such shapes and is made separate from the tile.

Siding Tile—This term is applied to all roofing tile used on upright work of whatever character. The six inch shingle is adapted to this work.

Graduated Tile—These are required for round tower, circular bays and porches, or other circular roofs, and can be furnished in any pattern of tile.

Technical Terms:

End bands—Half tile cut the long way of the tile and made for "A", "B" and Panama. End bands are used in order to break joints.

Top Tile—Special top tile are required with all patterns except the "A", "B" and Panama. With the roll shapes they are the regular tile flattened at the top.

Extra—In estimating the roof, the full dimensions of the roof should be taken for the number of squares, including all cut and closed tile of whatever character. Cut work and closed work are charged for extra per foot in addition to the surface measurements for squares and are not included in estimate unless request is made.

Corner Block—The piece used at corner intersections of the deck moulding.

Closed Ridge End—The piece of ridge used at the ridge or gable end when the ridge is closed down and not formed into a terminal.

Cut and Closed Valley Tile—The plain tile which verges on the valleys and is cut at correct angle of valley. When the cut side is filled in the green tile at the factory, it is called Closed Valley Tile. Closed Valley Tile are furnished with all roll patterns if required.

Finial—The particular piece of trimming which stands by itself to finish a section of roof that is such as would be required for a round tower or an octagon tower.

Beveled Eave—Beveled eaves are required on all roll shapes except where eave closures are used and are sometimes called bottoms.

Terminal—The piece that terminates the ridging. Terminals are of two kinds—either gable terminals or hipped terminals. The latter may be either 1-way, 2-way or 3-way, etc., the number of ways depending on the number of hip rolls which run into the terminal. The ridging is never counted as a way because the word terminal implies ridging.

General Specifications.

THESE specifications may be used in connection with special specifications for the particular tile you desire.

Before the felt is laid have all chimneys and walls above the roof completed, and have all vent pipes put through the roof Furnish strips of required width for hips and ridges, also 1x⅞ inch cant strips under the eave tile. The metal contractor shall have the Valley metal in place. Valleys shall be held in place with clips fastened to the metal and shall not be punctured in any manner. Metal shall be bent over 1x2 strips running parallel on each side of the valley, and a layer of felt running lengthwise with the valley should be placed under the metal. The felt from the roof proper shall lap over the valley metal at least 6 inches. The sheet metal contractor shall have in readiness all flashings used on the front and side dormers, walls, sky-lights, towers and vent pipes, and shall place same under the direction of the roofer.

FELT—Cover all pitch roofs with one layer of asphalt felt weighing not less than thirty pounds per square. Same shall be laid parallel with the eaves; each layer lapped at least 3 inches and nailed with capped or large headed nails. The felt of the Valley shall lap over the Valley metal at least 6 inches and under the flashing 6 inches.

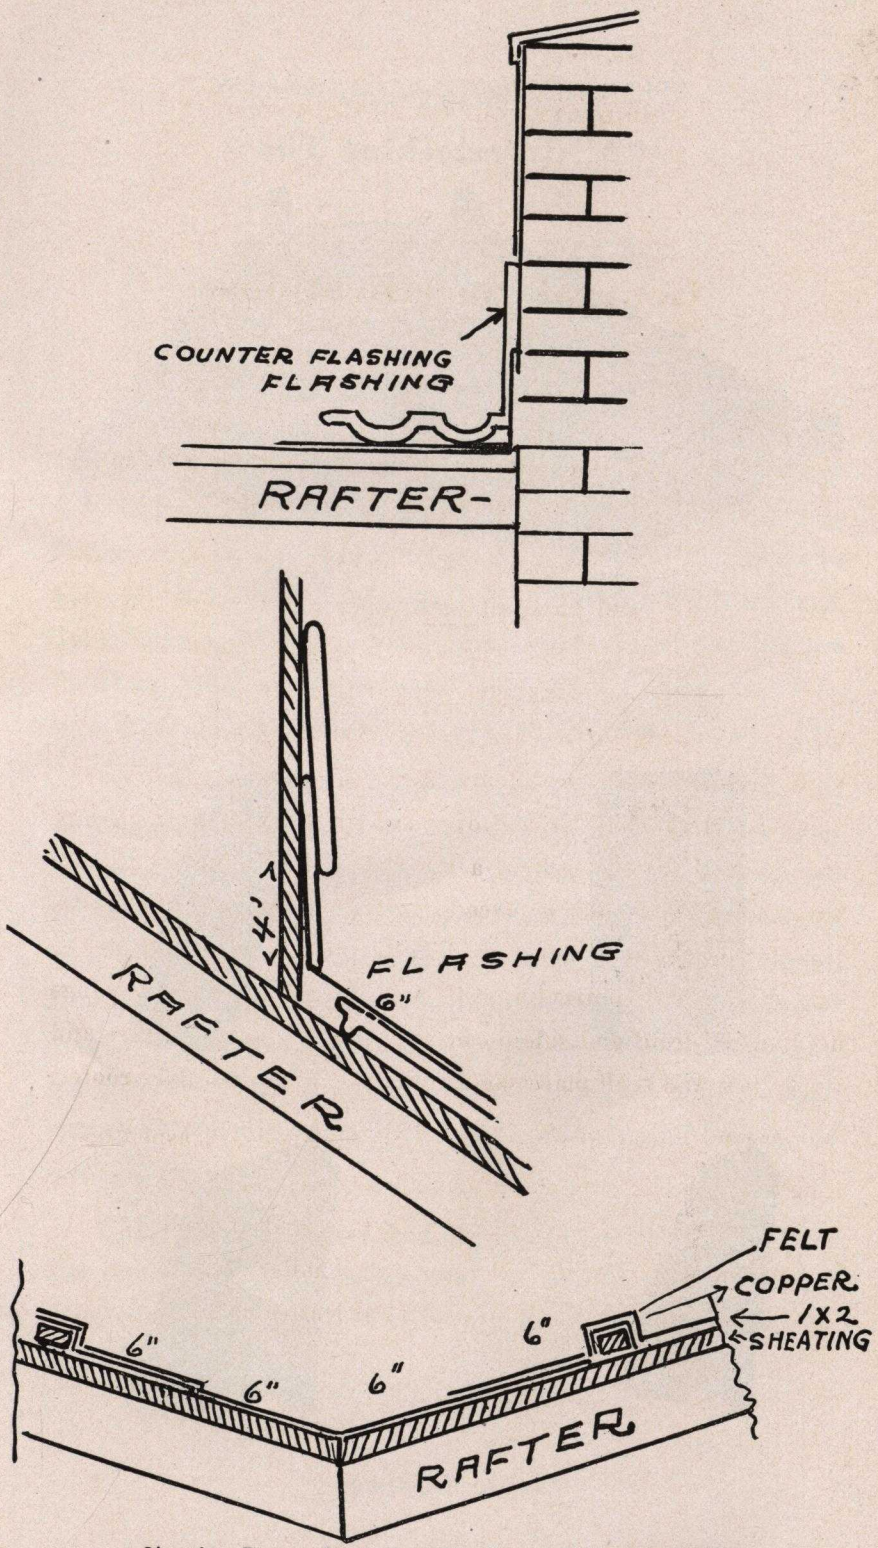

Showing Proper Method of Flashing and Laying Valleys

"A" Interlocking Tile

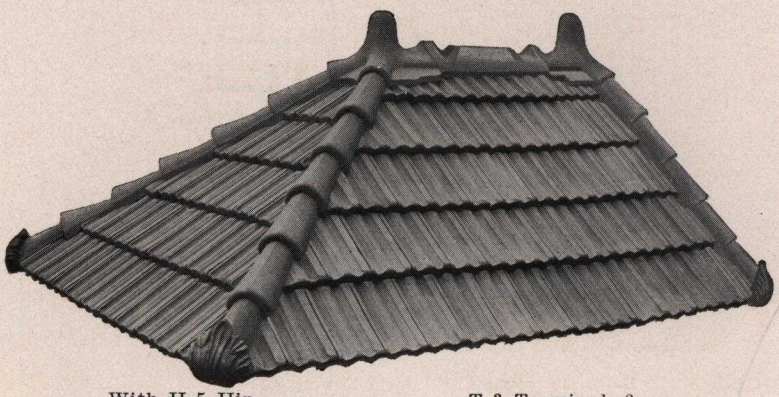

With H-5 Hip
H-5 Starter,

T-3 Terminal, 2-way
R-5 Ridge

Size of Tile .....9 in. x 15½ in.
Gauge .....7½ in. x 12¾ in.
Number to square 150
Shipping weight, including trimmings, 1000 lbs.



"A" Whole Tile

"A" Half Tile

Half

Whole

Gable Coping

"A" and "B" TILE Specifications.

ALL roofs to be covered with hard burned Corrugated Interlocking "A" pattern tile (red or green) as manufactured by Mound City Roofing Tile Company with standard trimmings as follows: H-5 Hip Roll and Starters, R-5 Ridge, T-3 Terminals, Gable Rake and Gable Bumps. Tile shall be nailed direct to the sheathing with 8d copper nails. The Eave Course should be spaced 11⅞ inches, other courses 12⅞ to 13 inches.

No attempt shall be made to stretch the courses. The tile must be so laid that the vertical lines are parallel with each other and at right angles to the eaves. The tile that verge along the hip shall be cut close to the hip board and a water-tight job made by cementing the cut tile to the hip board with elastic cement. The joints of hips and ridges should be cemented, but the interior space of the hip and ridge rolls must not be filled with the pointing material. After the roofer has completed the work he shall make a careful inspection of the roof and remove all broken and damaged tile.

STRIPS—If strips are used, lay same parallel with the eaves and space properly. The tile shall be held in place by wiring every tile in the eave course and every third above the eave course with copper wire.

"B" Interlocking Tile

With H-5½ Hip
H-5½ Starter, plain

R-1½ Ridge
T-3 Terminal, 2-way

Size of Tile .....8½ in. x 12⅜ in.
Gauge .....10 in. x 7½ in.
Number to square 192
Shipping weight, including trimmings, 1018 lbs.

"B" Gable Coping



"B" Tile



"B" Half Tile

"C" Spanish Tile

With H-3 Hip
H-3 Starter, ornamental
R-1 Ridge
T-3 Terminal, 2-way

Size of Tile ..... 12½ in. x 9½ in.
Gauge ..... 10 in. x 8 in.
Number to square 180
Shipping weight, including trimmings, 986 lbs.

"C" Spanish

Left Gable Coping

Flat Top



Closed Eave

Southern Spanish is similar to "C" Spanish in shape, only smaller. Used on upright work and porches, where small tile are required.

"C" Spanish Tile Specifications.

ALL roofs to be covered with hard burned Interlocking "C" Spanish tile (red or green), as manufactured by Mound City Roofing Tile Company with standard trimmings as follows: H-3 or 5, Hip Roll, R-1 Ridge Roll, T-3 Terminals, Eave Closures (Closed Eaves) shall be used at the eave line. Tile shall be nailed direct to the sheathing with 6d copper nails.

The roofer shall see that all tile are well locked and laid smooth (care must be taken to see that 3/8 inch play is left in bottom lock). No attempt shall be made to stretch the courses. The tile must be so laid that the vertical lines are parallel with each other and at right angles to the eaves. The tile that verge along the hip shall be cut close against the hip board and a water-tight job made by cementing the cut tile to the hip board with elastic cement. The joints of hips and ridges should be cemented, but the interior space of the hip and ridge roll must not be filled with the pointing material. After the roofer has completed the work he shall make a careful inspection of the roof and remove all broken and damaged tile.

STRIPS—If strips are used, lay same parallel with the eaves and space properly. The tile shall be held in place by wiring every tile in the eave course and every third tile above the eave course with copper wire.

"S" Spanish

With H-4 Hip

H-4 Starter, Ornamental
R-4 Ridge
T-7 Terminal, 2-Way
R-4 Terminal, gable

Size of Tile	9 in. x 13 in.
Gauge	8 in. x 10¼ in.
Number to square	178
Shipping weight, including trimmings	955 lbs.

"C" Spanish Tile

Right Gable Coping

Flat Tops

Closed Eaves

"S" Spanish Tile Specifications.

ALL roofs to be covered with hard burned Interlocking "S" Spanish tile (red or green), as manufactured by Mound City Roofing Tile Company with standard trimmings as follows: H-3 or 5, Hip Roll, R-1 Ridge Roll, T-3 Terminals, Eave Closures (Closed Eaves) shall be used at the eave line. Tile shall be nailed direct to the sheathing with 6d copper nails.

The roofer shall see that all tile are well locked and laid smooth (care must be taken to see that 3/8 inch play is left in bottom lock). No attempt shall be made to stretch the courses. The tile must be so laid that the vertical lines are parallel with each other and at right angles to the eaves. The tile that verge along the hip shall be cut close against the hip board and a water-tight job made by cementing the cut tile to the hip board with elastic cement. The joints of hips and ridges should be cemented, but the interior space of the hip and ridge roll must not be filled with the pointing material. After the roofer has completed the work he shall make a careful inspection of the roof and remove all broken and damaged tile.

STRIPS—If strips are used, lay same parallel with the eaves and space properly. The tile shall be held in place by wiring every tile in the eave course and every third tile above the eave course with copper wire.

Cascade Spanish

Size of Tile.....10½ in. x 13¾ in.
Gauge .....10 in. x 8½ in.
Number to square.....170
Shipping weight, including trimmings, 899 lbs.



Closed Eave

Cascade Spanish



Flat Top



Closed Eave
Inverted Tile Showing
Fixed Closure

Gable Coping furnished with this pattern.

Cascade Spanish Tile Specifications

ALL roofs to be covered with hard burned Interlocking Cascade Spanish tile (red or green), as manufactured by Mound City Roofing Tile Company with standard trimmings as follows: H-3 or 5, Hip Roll, R-1 Ridge Roll, T-3 Terminals, Eave Closures (Closed Eaves) shall be used at the eave line. Tile shall be nailed direct to the sheathing with 6d copper nails.

The roofer shall see that all tile are well locked and laid smooth (care must be taken to see that 3/8 inch play is left in bottom lock). No attempt shall be made to stretch the courses. The tile must be so laid that the vertical lines are parallel with each other and at right angles to the eaves. The tile that verge along the hip shall be cut close against the hip board and a water-tight job made by cementing the cut tile to the hip board with elastic cement. The joints of hips and ridges should be cemented, but the interior space of the hip and ridge roll must not be filled with the pointing material. After the roofer has completed the work he shall make a careful inspection of the roof and remove all broken and damaged tile

STRIPS—If strips are used, lay same parallel with the eaves and space properly. The tile shall be held in place by wiring every tile in the eave course and every third tile above the eave course with copper wire.

Closed Shingle Panama Tile

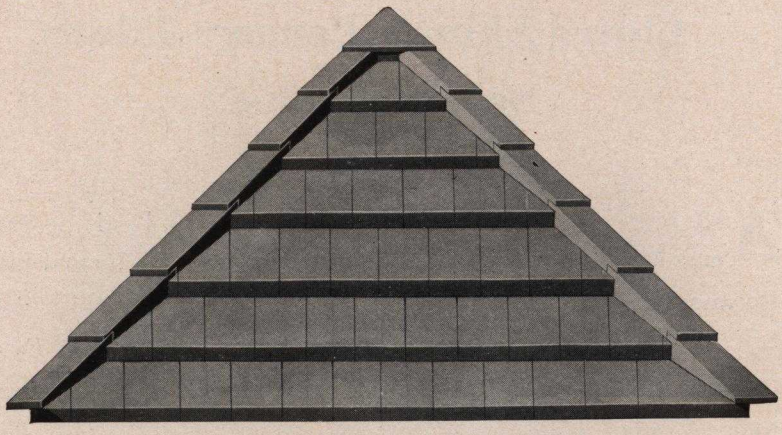

With H-8 Hip
H-8 Starter, plain

R-6 Ridge
T-2 Terminal, 2-way

Size of Tile .....8½ in. x 13¾ in.
Gauge .....7¾ in. x 10½ in.
Number to square 177
Shipping weight, including trimmings, 1251 lbs.

Whole



Half

Panama Gable Coping

Panama Tile



Closed Eave

Half Tile

Closed Shingle Panama Tile. Specifications.

ALL roofs to be covered with hard burned Closed Shingle Panama Tile (red or green), as manufactured by the Mound City Roofing Tile Company with trimmings as follows: H-8 Hip Roll and Starters, R-6 Ridge and Terminals, Gable Rake and Eave Closures shall be used. Tile shall be nailed direct to the sheathing with 6d copper nails. Care should be taken to see that the eave line is perfectly straight and parallel to the gutter.

The roofer shall see that all tile are well locked and laid smooth. (Care must be taken to see that 3/8 inch play is left in bottom lock). No attempt shall be made to stretch the courses. The tile must be so laid that the vertical lines are parallel with each other and at right angles to the eaves. The tile that verge along the hip shall be cut close against the hip board and a water-tight job made by cementing the cut tile to the hip board with elastic cement. The joints of hips and ridges should be cemented, but the interior space of the hip and ridge rolls must not be filled with pointing material. After the roofer has completed the work he shall make a careful inspection of the roof and remove all broken and damaged tile.

STRIPS—If strips are used, lay same parallel with the eaves and space properly. The tile shall be held in place by wiring every tile in the eave course and every third tile above the eave course with copper wire.

Mission Tile, Showing Construction

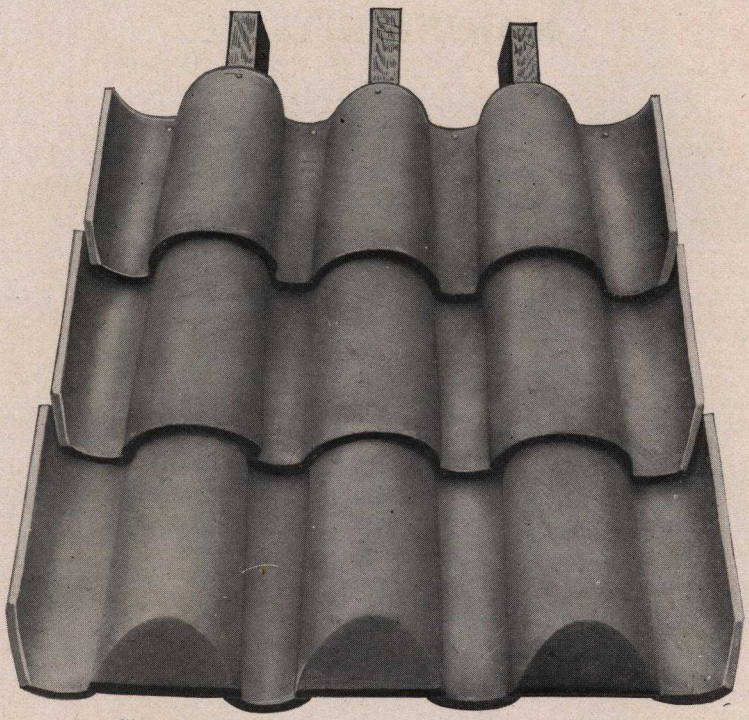

Size of Tile .....15½ in. x 7¾ in.
Gauge ..... 9½ in. x 12 in.
Number to square. 210—105 Roll; 105 Pan.
Shipping weight, including trimmings, 1370 lbs.

Mission Ridge

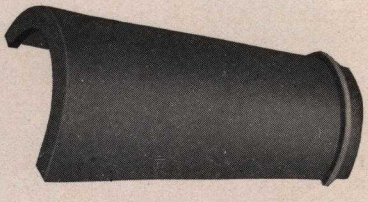

Mission Hip

MISSION TILE

Specification.

ALL roofs to be covered with hard burned Mission Tile (red or green), as manufactured by the Mound City Roofing Tile Company with standard trimmings as follows: H-1 Hip Roll and Starters, R-1 Ridge, T-6 Terminals. Closed Eaves or Mission Eaves shall be used at Eave line.

The contractor shall provide and have ready for the roofers' use 2x4 strips which must be placed parallel with each other and at right angles to the eaves. Strips should be spaced at 11½ inch centers. Each pan and roll shall lap the preceding one at least 3 inches. Care must be taken not to stretch the courses. Tile should be nailed with 6d copper nails. All tile should be so laid that the vertical lines are parallel with each other and at right angles to the eaves. The tile that verge along the hip shall be cut close along the hip board and a water-tight job made by cementing the cut tile to the hip board. The joints of hips and ridges should be cemented, but the interior space of hip and ridge rolls must not be filled with pointing material. After the roofer has completed the work he shall make a careful inspection of the roof and remove all broken and damaged tile.

Greek Tile

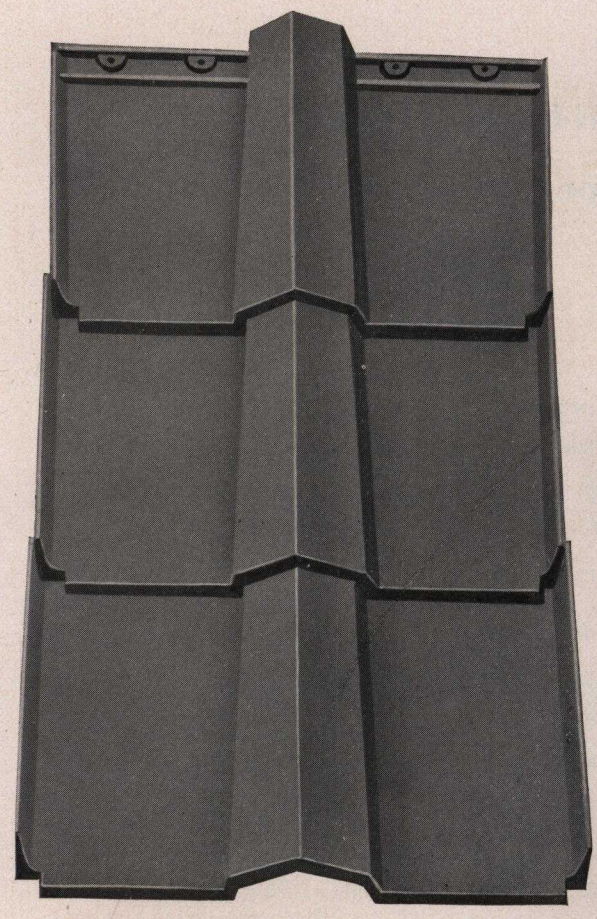

Greek Ridge

Size of Tile—Pans .....13¼ in. x 8½ in.
Size of Tile—Cover .....13¾ in. x 5¼ in.
Gauge .....11 in. x 11 in.
Number to square, 240—120 covers; 120 pans.
Shipping weight, including trimmings, 1121 lbs.

Hexagon Cover Tile

Pan Tile



Octagon Cover Tile



GREEK TILE
Specifications.

ALL roofs to be covered with hard burned Greek Pattern tile (red or green), as manufactured by Mound City Roofing Tile Company, with Greek or Roman Covers and standard trimmings as follows: H-8 Hip Roll and Starters, R-6 Ridge and Terminals. Closed Eaves shall be used on covers.

The contractor shall furnish 1x2½ strips, same to be laid at right angles to the eaves and parallel with each other. The strips must be properly spaced to receive the Roman covers of the tile. The roofer shall see that all tile are well locked and laid smooth. No attempt shall be made to stretch the courses. The tile shall be so laid that the vertical lines are parallel with each other and at right angles to the eaves. The tile that verge along the hip shall be cut close against the hip board and a water-tight job made by cementing the cut tile to the hip board. The joints of hips and ridges should be cemented, but the interior space of the hip and ridge rolls must not be filled with the pointing material. After the roofer has completed the work he shall make a careful inspection of the roof and remove all broken and damaged tile.

Shingle Tile

Size of Tile .....6 in. x 13½ in.
Gauge .....5½ in. x 6 in.
Number to square 400
Shipping weight, including trimmings, 1155 lbs.

Plain Shingle

Round Butt Shingle

"B" SPECIAL
Size of Tile ....7 in x 10¾ in.
Gauge ..... 6 in x 8½ in.
Number to square....283
Shipping wt., including Trimmings 971



Mitred Hip

Half Tile

Mitred Corner

Specifications.

All upright spaces such as sides and front of dormers, gables and the bases of towers shall be covered with hard burned shingle tile (red or green), as manufactured by the Mound City Roofing Tile Company. All tile shall be laid 6 inches to the weather and no attempt made to stretch courses beyond specified distance.

PROMENADE TILE.

The "Promenade" Tile is made especially for covering flat Roofs and Promenades.

It is 6 inches by 9 inches by ¾ or 1 inch in size, laid in asphaltum with smooth face on top, which enables the water to easily run off with one per cent fall.

This tile also makes a most excellent paving material. It is impervious to moisture, being a very compact body and burnt to a high degree of heat.



6 in. x 9 in. x ¾ in. thick; wt. per square 840 lbs.
Number to Square, 268
6 in x 9 in. x 1 in. thick; wt. per square....880 lbs.

PROMENADE TILE

Specifications.

WHERE Promenade tile is required it shall be of hard burned 6 inch by 9 inch by 1 inch square edge roofing tile as manufactured by the Mound City Roofing Tile Company. The roof, if concrete, shall be covered as follows: The entire roof surface must be covered with coal tar pitch, applied hot, into which is to be embedded a layer of coal tar felt weighing not less than 14 pounds per square followed by alternate layers of pitch and felt until five layers of pitch and five layers of felt have been applied.

If Promenade tile is to be laid over a wood roof the first layer of pitch is omitted and one layer of rosin paper is applied. The balance of specifications are to be carried out the same.

The pitch must not be applied so hot as to injure the felt. Each layer of felt must lap four-fifths of the layer below. The amount of pitch used for mopping, including the first coat, must not be less than 150 pounds per 100 square feet. The top layer of felt must not be mopped with the pitch.

Over the water-proofing the tile is to be laid in asphalt mastic not less than ⅛ inch thick, joints to be ¼ to ½ inch wide, filled half-way with asphalt mastic and the balance of joint flushed with cement mixture about 3 to 1.

The pitch must be straight run residue obtained from the distillation of coal tar. The melting point of the asphalt mastic must not be less than 160 degrees.

TRIMMINGS.

UNDER heading of trimmings we include Ridge Roll, Hip Roll, Hip Roll Starters, Terminals, Gable Terminals and Finials. Standard trimmings is a phrase employed to indicate standard or stock patterns designed by the manufacturer as most suitable for the average roofing tile job. So far as pitch may permit, such trimmings are carried in stock for immediate shipment. Any different from standard pitch is special, and price is made on same only on request, and when detail of what is required is submitted.

Ridge Roll is made with one inch or more lock or lap joints and run in various lengths with an average thickness of one inch. They are made to fit any pitch.

We also make all Terminals and Finials to fit any pitch, which is a very great improvement over the terminals, recently offered by all manufacturers, which had to be made at the required pitch We will make Finials after architects' designs, if practical, and in such cases we require full details. When the choice of trimmings is left to our judgment, we always seek to ship what is the most suitable for the pattern of tile selected.

Hip No. 1

Length, 12 inches to weather
Width, inside.....4 in.
Height, outside....5 in.
Weight .....7½ lbs.

H-1 Plain Starter

H-1 Ornamental Starter

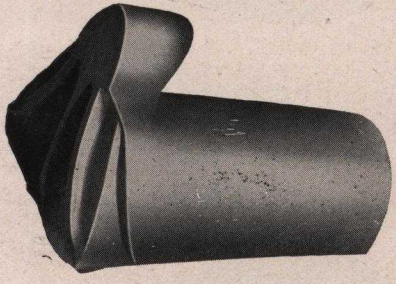

Hip No. 2

Length, 12 inches to weather
Width, inside....3½ in.
Height,outside 3½ in.
Weight .....4½ lbs.

H-2 Plain Starter

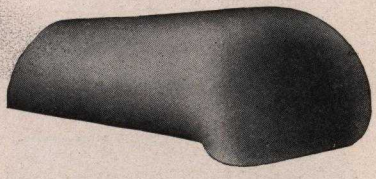

H-2 Ornamental Starter

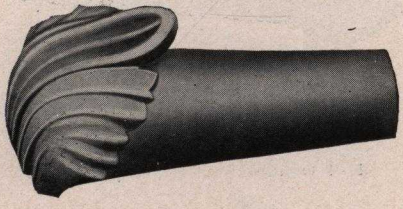

Hip No. 3

Length, 12 inches to weather
Width,inside ....5½ in.
Height, outside ..5 in.
Weight .....6¼ lbs.

H-3 Plain Starter

H-3 Ornamental Starter

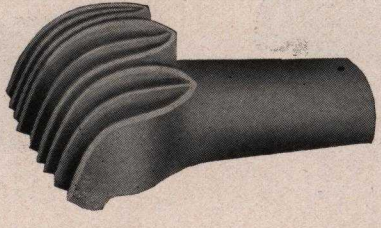

Hip No. 4

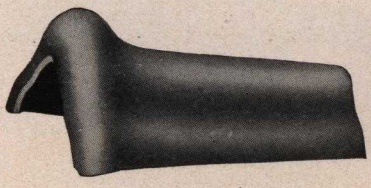

Length, 12 inches to weather
Width, inside....5¾ in.
Height, outside ..6 in.
Wt. per foot, 7½ lbs.

Hip No. 5

Length, 12 inches to weather
Width, inside ..3½ in.
Height,outside 3½ in.
Weight .....4½ lbs.

H-4 Plain Starter

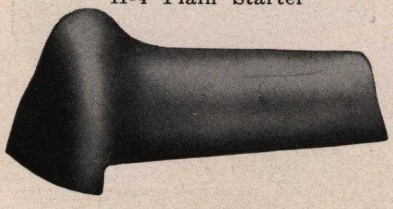

H-2 Plain Starter

H-4 Ornamental Starter

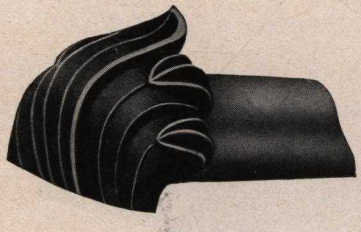

H-5 Plain Starter

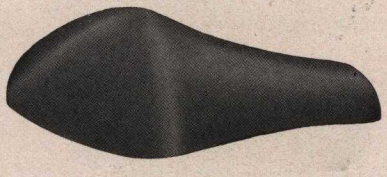

Hip No. 5½

Length, 10 inches to weather
Width, inside....4½ in.
Height, outside ..3 in.
Wt. per foot....2½ lbs.

H-5½ Plain Starter

Hip No. 6

Length to weather.....9 in.
Width inside.....2¾ in.
Height outside.....3 in.
Weight per foot.....2¼ lbs.

H-7 Plain Starter

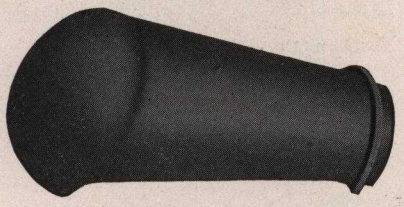

H-7 Ornamental Starter

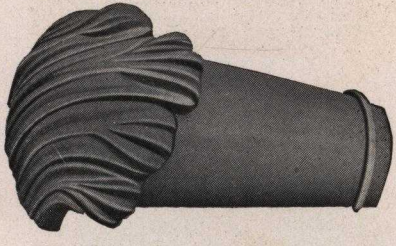

H-6 Plain Starter

Ornamental Hip Starter made for Hip No. 6

Hip No. 8

Length to weather.....12 in.
Width inside.....6 in.
Height outside.....3 in.
Weight per foot.....6¾ lbs.

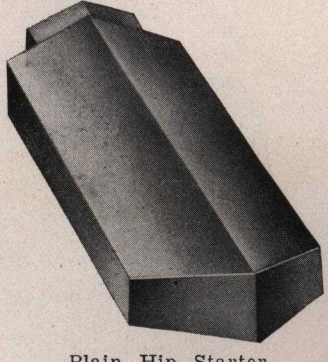

Plain Hip Starter made for Hip No. 8

R-1 Ridge

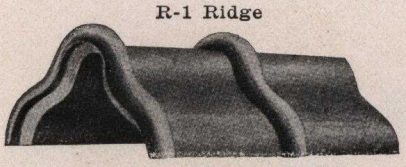

Length to weather.....20 in.
Width inside..... 9 in.
Height outside.....6½ in.
Weight per foot.....13½ lbs.

R-1 Closed End



R-1½ Ridge

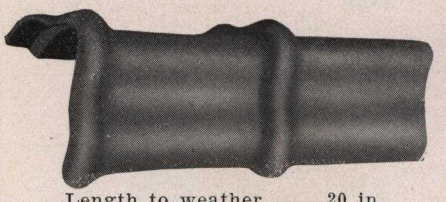

Length to weather.....20 in.
Width inside .....6 in.
Height outside .....5 in.
Weight per foot .....10 lbs.

R-1½ Closed End

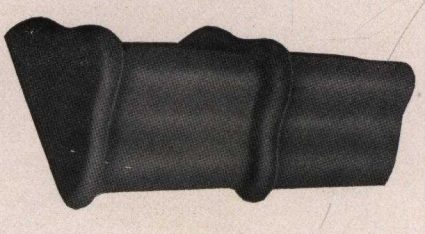

R-2 Ridge



Length to weather.....16 in.
Width inside..... 9 in.
Height outside .....6½ in.
Weight per foot.....14 lbs.

R-2 Closed End

R-1 Gable Terminal

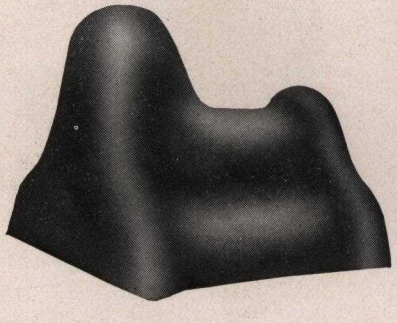

R-1½ Gable Terminal

Length to weather .....12 in.
Width inside..... 6 in.
Height outside.....10 in.
Weight per foot.....14 lbs.

R-3 Ridge



Length to weather.....15 in.
Width inside .....13 in.
Hight inside .....13 in.
Weight per foot .....25 lbs.

R-4 Ridge



Length to weather .....12 in.
Width inside .....9 in.
Height outside .....7 in.
Weight per foot .....7½ lbs.

Gable Terminal R-4
Plain R-4 Closed Ends
also made

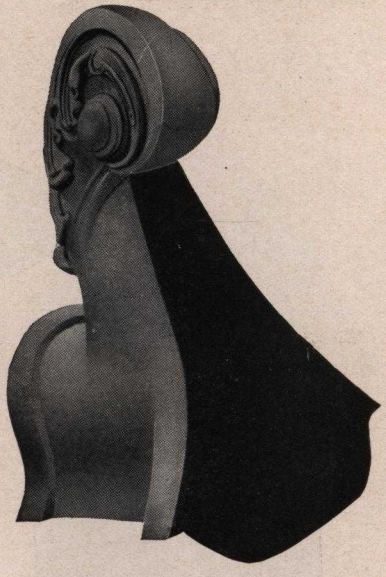

R-3 Ventilator



R-3 Gable Terminal

R-5 Ridge

Length to weather .....20 in.
Width inside .....9 in.
Height inside .....4 in.
Weight per foot .....10 lbs.

R-5 Closed End

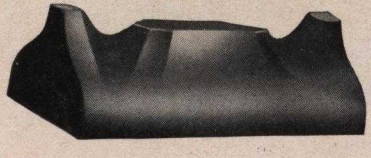

R-5 Gable Terminal

Fig. No. 33 DR3



Length to weather .....15 in.
Height against wall .....13 in.
Weight per foot .....12 lbs.

F 1

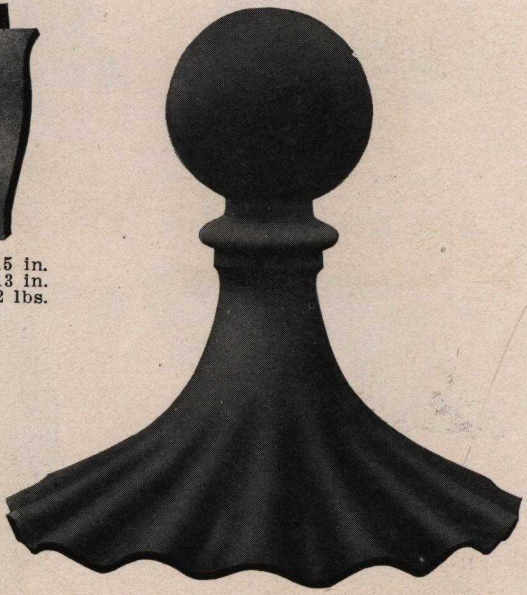

This finial made to fit any pitch or number of Hip take-up required.

R-6 Ridge

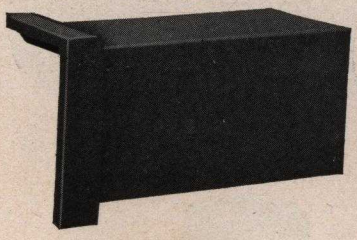

R-6 Ridge Closed End

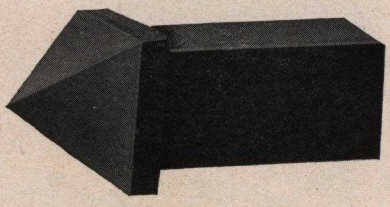

Fig. No. 31 R1—T

Length to weather .....12 in.
Width inside .....8 in.
Weight per foot .....14 lbs.

Fig. No. 31 DR1



Length to weather.....12 in.
Height against wall .....6 in.
Weight per foot .....5½ lbs.

Length to weather .....12 in. Width inside .....9 in.
Height outside .....6½ in. Weight per foot .....13½ lbs.

Fig. No. 55 T5

Fig. No. 54 T4

Fig. No. 56 T6

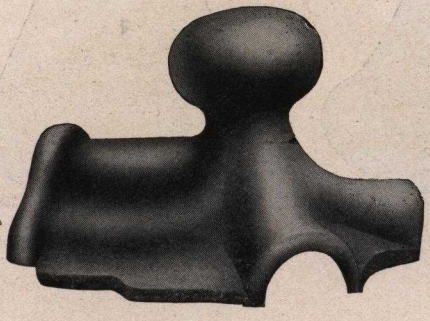

Fig. No. 57 T7

Fig. 1

Fig. No. 58 T8

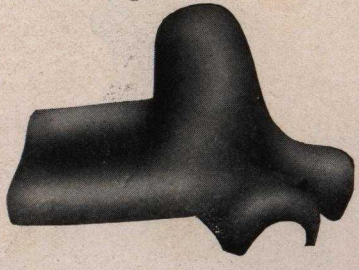

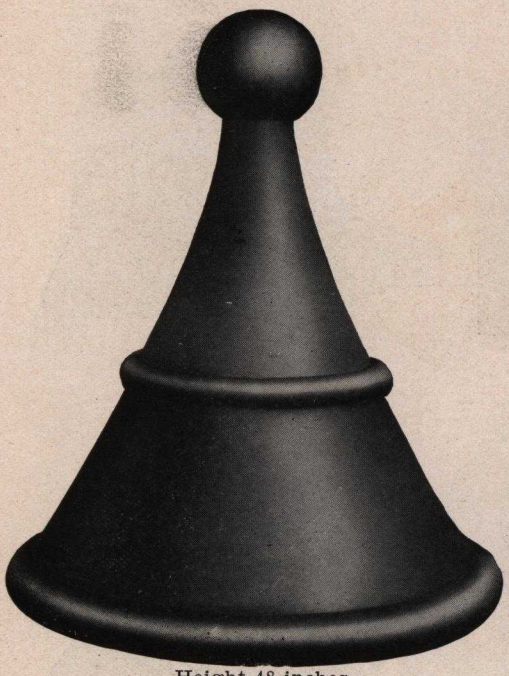

Height 48 inches
F 2

Height 42 inches
F 3

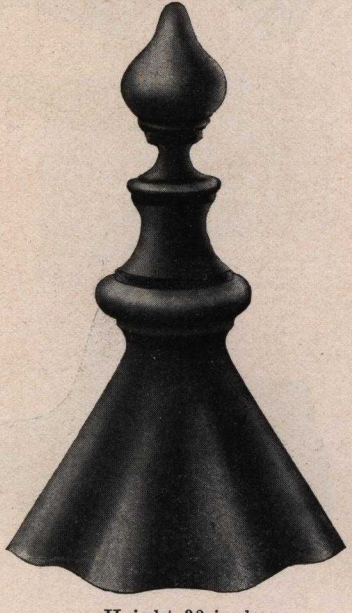

Height 32 inches
F 5

Height 20 inches
F 4

Crestings for Slate Roofs

Fig. No. 37 R7



Length to weather 12 in
Pitch ..... one half
Height outside .....12 in
Weight per ft.....15 lbs

Fig. No. 38 R8



Length to weather 12 in
Pitch ..... one half
Height outside .....18 in
Weight per ft....15½ lbs

Fig. No. 41 R11



Length to weather 12 in
Pitch ..... one half
Height outside .....12 in
Weight per ft....15½ lbs

Fig. No. 40 R10



Length to weather 12 in
Pitch ..... one half
Height outside .....13 in
Weight per ft.....15 lbs

Fig. No. 44 R14



Length to weather 17 in
Pitch ..... one half
Ht. above ridge....10½ in
Weight per ft.....31 lbs

Fig. No. 42 R12



Length to weather 12 in
Pitch ..... one half
Height outside .....12 in
Weight per ft.....15 lbs

Fig. No. 39 R9



Length to weather 12 in
Pitch ..... one half
Height outside .....13 in
Weight per ft.....20 lbs

ST. LOUIS' NEW CATHEDRAL